



sonar sea

LN59-MLS

GPS POSITION



GPS SYNC



GSM CONTROL




5-9 NM WITH INTEGRATED SOLAR PANELS SMART MARINE LANTERN LN59-MLS

With its sturdy construction and high corrosion-resistant aluminum alloy body, the **LN59-MLS** demonstrates resilience to even the most challenging meteorological conditions. The smart marine lantern operates independently with its built-in solar panels and battery, visible from a distance of 5-9 nautical miles, with LEDs compliant with IALA Recommendation E200-2 and a lifespan of over 100,000 hours. The smart marine lantern is available in yellow, red, green or white, in accordance with the color space defined by IALA Recommendation E200-1. It can be configured via IR remote such as flashing rate, flashing mode and intensity and synchronize its flashing pattern via its high-quality built-in GPS receiver.

HIGH-QUALITY LENS GROUP

The **LN59-MLS** is equipped with precisely developed optical components to ensure accurate light distribution. Due to the optical components that are compliant with IALA Recommendation E200-1, E200-2 and E200-3, the light's vertical divergence angle is greater than 14 degrees, and its 6-lens design ensures visibility from all directions.

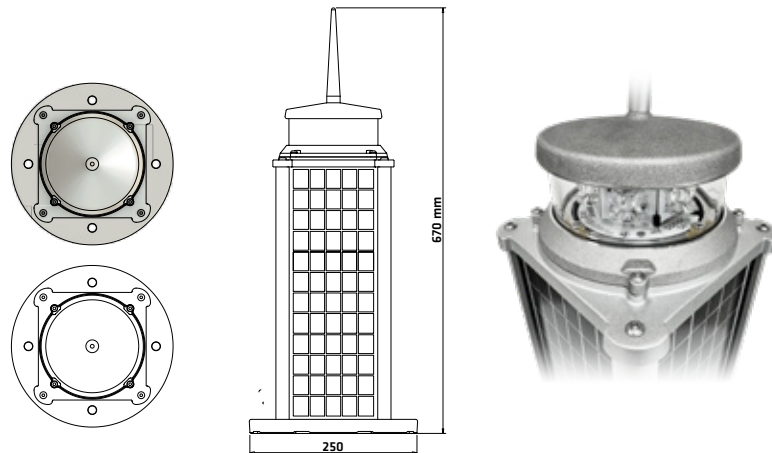

INTERNAL GPS

The LN series smart marine lantern can flash synchronously using the built-in high-quality GPS receiver. Additionally, the **LN59-MLS** can calculate sunrise and sunset times for its current location every day, due to its Sync Start and Stop feature. It begins flashing at sunset time and stops at sunrise eliminating timing errors across various locations, slopes, angles, or light conditions, ensuring consistent flashing between sunset and sunrise. Multiple LN series smart marine lanterns in the same location can start and stop flashing simultaneously.

INTERNAL GSM (OPTIONAL WITH BATTERY PACK)

Designed to operate fully independently in hard-to-reach areas, the LN series marine lanterns continuously monitor its own operational status and generate warnings for issues such as solar panel contamination or insufficient energy production. Through optional GSM integration, it also can be configured via a web page, transmit data such as operating status, battery level, and location information, and trigger an alarm if it stops working or moves outside the defined location. If the LED unit encounters problems like brightness reduction, efficiency loss, or failure, fault information is transmitted via GSM.





**sonar
sea**
LN59-MLS

5-9 NM WITH INTEGRATED SOLAR PANEL SMART MARINE LANTERN LN59-MLS

HIGH EFFICIENCY SOLAR PANELS & MAINTENANCE FREE BATTERY

Equipped with high-efficiency solar panels, the smart marine lantern can generate up to 34W, enabling the internal battery to be fully charged without an external power source. The deep-cycle battery can reach up to 12V 24Ah and operates safely over extended periods without requiring maintenance.

LIGHT FEATURES

LIGHT SOURCE	LED
COLOR OPTIONS	Yellow, Red, Green, White
LIGHT INTENSITY (CD)	Yellow 653 Cd, Red 639 Cd, Green 868 Cd, White 706 Cd
VISUAL RANGE (NM)	5-9 NM @ 0.74
HORIZONTAL LIGHT DISTRIBUTION (DEGREE)	360°
VERTICAL LIGHT DISTRIBUTION (DEGREE)	>14°
FLASHING RATE	Up to 251 IALA compliant, User programmable (Optional)
FLASHING MODE	Light detection, specified time or automatic sunrise and sunset times (Optional)
INTENSITY	%25, %50, %75, %100, multiple intensity setting
CONTROL	IR remote, device control switch
LED LIFESPAN (HOURS)	>100000
LED	High Quality 6 Power LED
LENS	6 LENS 360° Clear Polycarbonate

ELECTRICAL FEATURES

NOMINAL VOLTAGE (12V)	12 V
BATTERY CAPACITY	24 Ah
BATTERY TYPE	SLA (Lead-Acid AGM)
CIRCUIT PROTECTIONS	Under and Over voltage, short circuit and current protection
AUTONOMY	>10 Days (16 hours Night - 8 hours Daytime / Flash Period 0.5 Sec On 3.5 Sec Off)
SOLAR PANEL TECHNOLOGY	Monocrystalline
SOLAR PANEL POWER (WATT)	33,6 W (4X8.4 W)
CHARGER	MPPT
BATTERY PROTECTION	Surge Current, Voltage and Short Circuit Protection, Blade type fuse and reverse polarity protection

PHYSICAL FEATURES

BODY MATERIAL	High-Quality Acrylic Paint Coated Marine Grade Aluminum Base and Chassis
SOLAR PANEL	Tempered Glass Protected
OPTICAL COVER	UV Resistant Acrylic PMMA
WATER RESISTANCE	IP 68
TEMPERATURE RANGE	-20 + 60°C
FIXING	Standard 200mm Bolt Pattern
HEIGHT (MM)	650mm
WIDTH (MM)	250mm
WEIGHT (KG)	16 kg

OPTIONS AND STANDARDS

STANDARDS	EN IEC 61000-6-3:2021, EN IEC 61000-6-4:2019 ETSI EN 301-489-1 V2.2.3, ETSI EN 301-489-52 V1.2.1, EN IEC 61000-6-2:2019, EN IEC 61000-6-1:2019
QUALITY MANAGEMENT	ISO 9001:2015
IALA COMPLIANCE	E200-1, E200-2, E200-3, G1065
OPTIONS	USB, RS-422, GPS Sync, GSM, Satellite Access, 34W 24 Ah Powerbank(20 days Autonomy), 50 mm Pole Mount